A181/USB-AAM-XFT

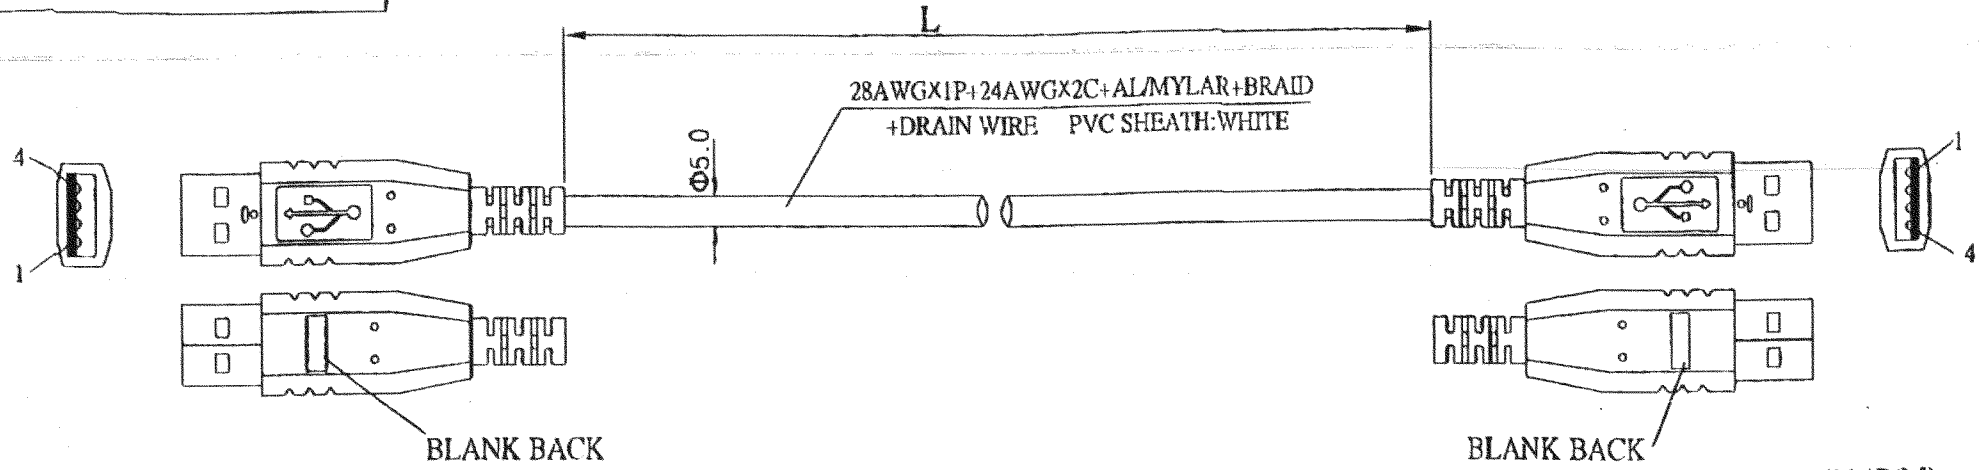

USB 1X4P(M)

USB 1X4P(M)

NOTE:

1.CABLE TO BE 100% TESTED FOR SHORT,OPEN,MISWIRE OR INSULATION OCCURRED.

2.TEST RESISTANCE:
CONDUCTOR RESISTANCE:1.0Ω,VOLTAGE RATING:300.0V/DC,
INSULATION RESISTANCE:5.0MΩ,WITHSTAND TIME:0.01S/POINT.
LOADING TEST:HEAD AND TAIL LOADS TWO TIMES UP AND DOWN.

3.MOLDING NO.:2DC-151;PVC COLOR:WHITE.

4.PACKING:

1PC/MINI TIE	L=xmm WHITE
1PC/PE BAG	15x17cm
PCS/BOX	47x34x20cm
PCS/PLASTIC BAG	74x88cm



PIN ASSIGNMENT:

USB 1X4P(M)	1	2	3	4	64
COLOR	RED	WHITE	GREEN	BLACK	DRAIN WIRE
USB 1X4P(M)	1	2	3	4	64

PART NO.:	L(mm)	MINI TIE x(mm)
USB -AAM-3FT	915.0±30.0	90.0
USB -AAM-6FT	1830.0±50.0	90.0
USB -AAM-10FT	3050.0±50.0	140.0

REV.	ECO.NO	DATE	DESCRIPTION	APPD.
A1	N	06/22/2000	N	

PART NO.: USB-AAM-XFT	USB-AAM-XFT		
THIS DRAWINGARE THE PROPERTY OF PORNGDA AND AS SUCH MAY NOT BE COPIED,REPRODUCED	UNITS: mm	MATL.:	TITLE.: USB 1X4P(M)/USB 1X4P(M)
APPD.:	X±	X'±	DWG NO.: PDA-1252
CHKD.:	X± 1.0	.X'±	
DR.: Wenxiaying	.XX±	.XX±	SCALE: N SHEET: 1/1 REV: A1